



Performance curve 145-EZS48-020

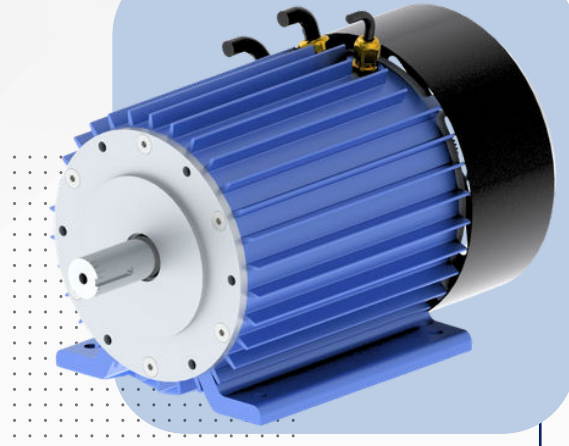

Model No.	145-EZS48-020
Rated power (W)	900
Peak power (kW)	2.8
Rated speed (RPM)	1900
Rated voltage (V)	48 VDC
Rated current (Amps)	20 Arms
Peak current (Amps)	60 Arms
Rated torque (Nm)	4.7
Peak torque (Nm)	14.5
Rated frequency (Hz)	126.66
Torque constant (Nm/Arms)	0.235
Voltage constant (Vrms/rad/s)	0.241
Rotor inertia (Kg/m ² sq)	0.00079149
Number of phases	Three Phase
Power factor	≈ 1
Efficiency	Designed for 93%
Winding method	Star/Y
Insulation class	H
Insulation resistance	>500 Mohm at 500 Vdc
Motor type	PM Synchronous
Protection class	>IP64
Winding material	100% Copper
Shaft material	Hardened EN 24
Magnet	NdFeB
Temperature sensor	PT 1000
Max winding sensor temperature	150° C
Core.	Cold Rolled Silicon Steel
Bearings	6206-2Z/C3, 6206-2Z/C3
Cooling	Natural Air Cooled, Forced Air Cool
Weight (Kg)	11 Kg
Mounting	Flange, Foot

Applications...

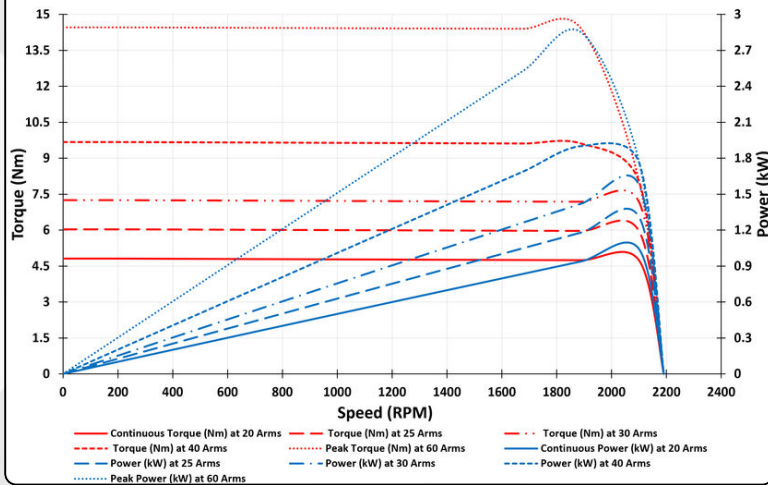

Construction & Mining
Equipments



Electric & Hybrid
vehicles/equipment



Farm & Agricultural
Equipments



Industrial Automation